
FLEX SING DED FIREPLACE INSERTS (000 (000






Clean Burning Fueled by clean burning e-NRG bioethanol **Toughened Safety Screen** Single Room Application Your Flex Fireplace features Single Sided fireplaces feature toughened glass to stabilise one open side - view the flame the flame in windy conditions **UL Listed** from the front. and provide an additional layer of safety and comfort. The Every model in the Flex Series Integrated windscreen sits flush is manufacturer approved behind the frame. for use with EcoSmart's UL Listed burners. Decorative Side Box When a decorative box is added, the panel between the ISTED standard fire and the decorative box is glass. Luxurious Finish Available in a timeless black finish, Flex Fireplaces come with stainless steel burners and black glass charcoal. **Built to Last a Lifetime Decorative Steel Log Sets** Zinc sealed steel construction powder coated with super hi-temp black paint EcoSmart Fire offers non-combustible logs prevents rusting so all fireplaces can as an optional, eye-catching accessory for be used both indoors or outdoors. models with the decorative side box. Made from stainless steel with a patina finish, they are available in two different finishes: Brass and Copper. True Zero Clearance Self-contained, zero clearance construction allows your Flex fireplace to be framed into wood or metal studs, providing installation freedom and flexibility for builders, architects, interior designers, landscapers and homeowners. **OPTIONAL** CCESSORIES Decorative Steel Logs



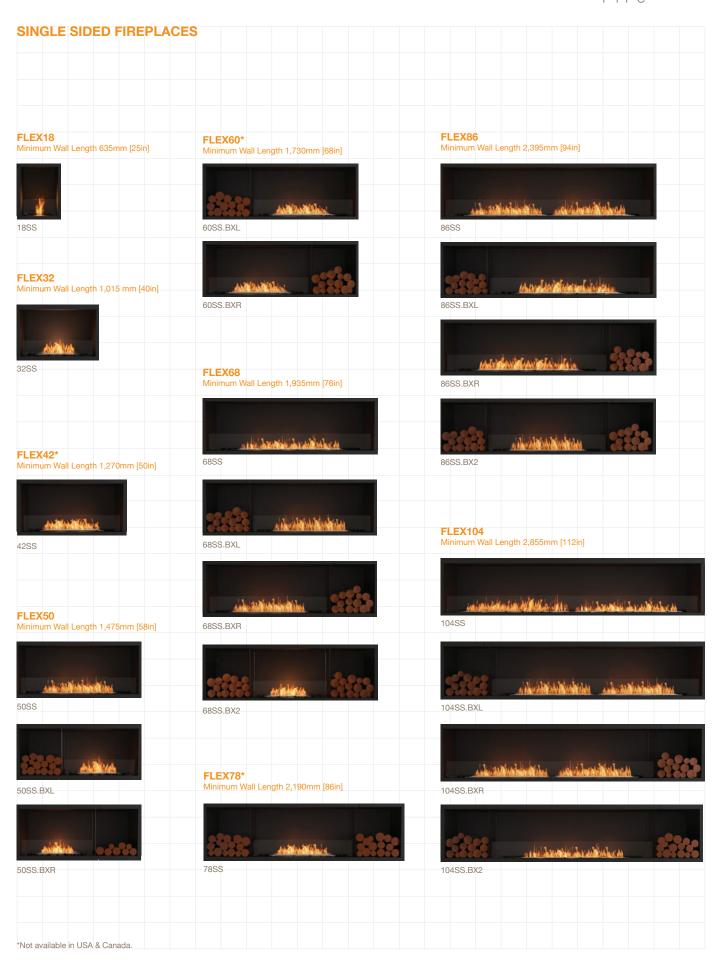



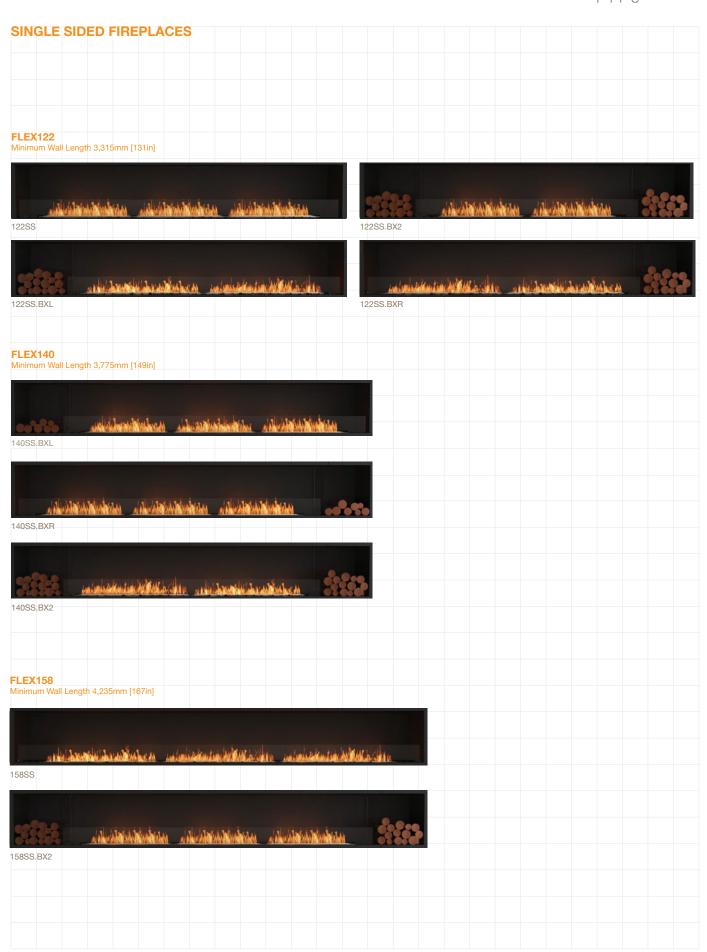



Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX18

ESF.1	I.FX.1	888
-------	--------	-----

Weight	25.7kg [56.5lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	AB3 x 1
Volume Capacity	2.5 Litres [0.7 Gallons]
Heats on Average (when used indoors)	Over 20 square metres [215 square feet]
Burn Time	8 - 11 hours (approx)
Minimum Room Size	40 cubic metres [1413 cubic feet] per fireplace.

FLEX32

ESF.1.FX.32SS


Weight	45.7kg [100.5lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL500 x 1
Volume Capacity	5 Litres [1.3 Gallons]
Heats on Average (when used indoors)	Over 40 square metres [430.6 square feet]
Burn Time	10 - 13 hours (approx)
Minimum Room Size	80 cubic metres [2825 cubic feet] per fireplace.

FLEX42

ESF.1.FX. 42SS	(Not available in USA & Canada)
Weight	60kg [131.9lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL700 x 1
Volume Capacity	7 Litres [1.8 Gallons]
Heats on Average (when used indoors)	Over 50 square metres [538 square feet]
Burn Time	9 - 12 hours (approx)
Minimum Room Size	90 cubic metres [3178 cubic feet] per fireplace.


Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

^{*} The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.

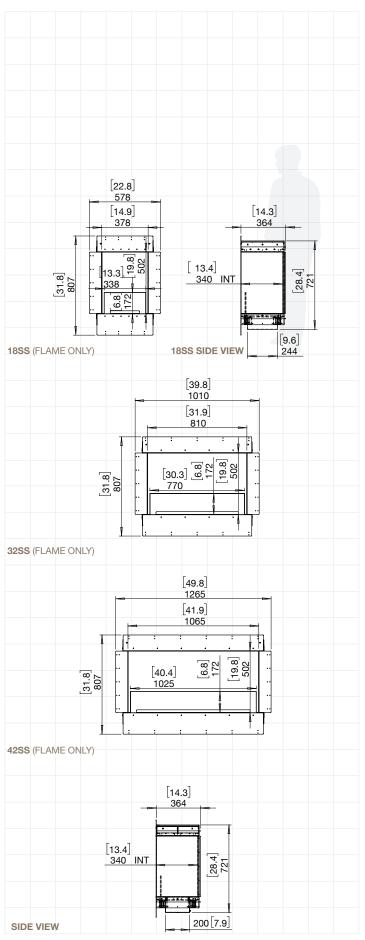

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL



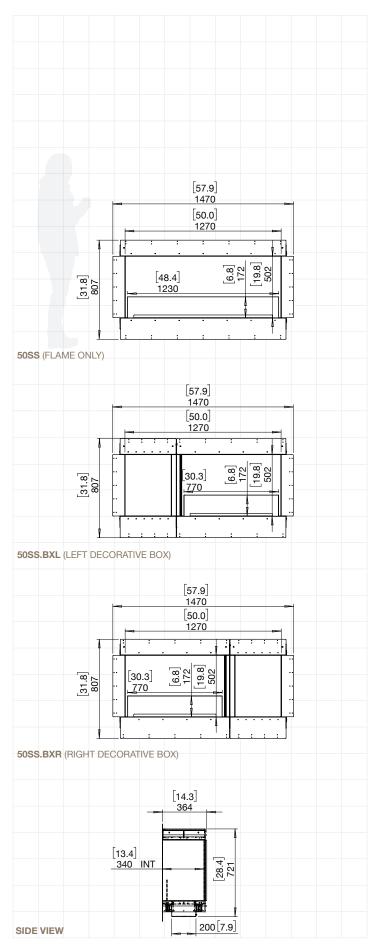

Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX50

ESF.1.FX.50SS

Weight	71.4kg [157.1lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 1
Volume Capacity	9 Litres [2.4 Gallons]
Heats on Average (when used indoors)	Over 60 square metres [645 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	110 cubic metres [3884 cubic feet] per fireplace.

ESF.1.FX.50SS.BXL ESF.1.FX.50SS.BXR

Weight	69.9kg [153.8lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL500 x 1
Volume Capacity	5 Litres [1.3 Gallons]
Heats on Average (when used indoors)	Over 40 square metres [430.6 square feet]
Burn Time	10 - 13 hours (approx)
Minimum Room Size	80 cubic metres [2825 cubic feet] per fireplace.

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. The Fire Company Pty Ltd (TFC), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "The Fire Company"), disclaim any and all liability or any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. TFC disclaims any and all liability arising out of the use or applications of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify TFC PtJs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estopped or otherwise, to any intellectual property rights is granted by this document or by any conduct of TFC. Customers using or selling PTC products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify TFC for any damages are indicative only.

 $^{^{\}ast}$ The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.




Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX60.BX

ESF.1.FX.60SS.BXL ESF.1.FX.60SS.BXR (Not available in USA & Canada) Weight $83.9 kg \; \left[184.6 lbs\right] \; \text{(Incl. burner/s, glass charcoal, glass)}$ Burner* XL700 x 1 **Volume Capacity** 7 Litres [1.8 Gallons] Heats on Average Over 50 square metres (when used indoors) [538 square feet] **Burn Time** 9 - 12 hours (approx) Minimum 90 cubic metres [3178 cubic feet] per fireplace. **Room Size**


Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

^{*} The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.

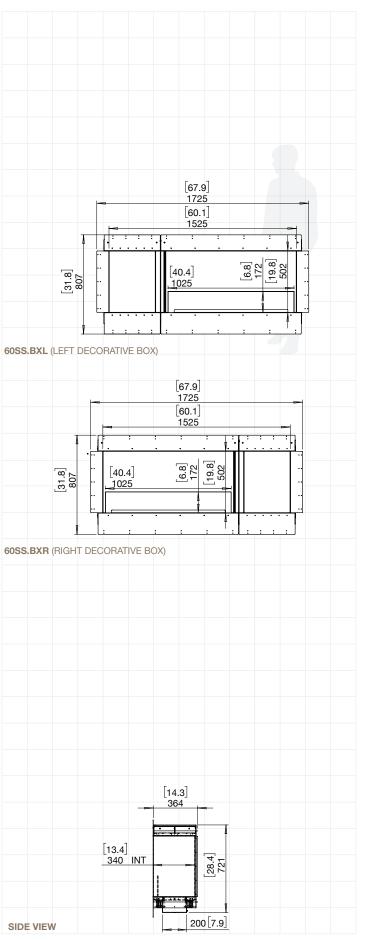

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL



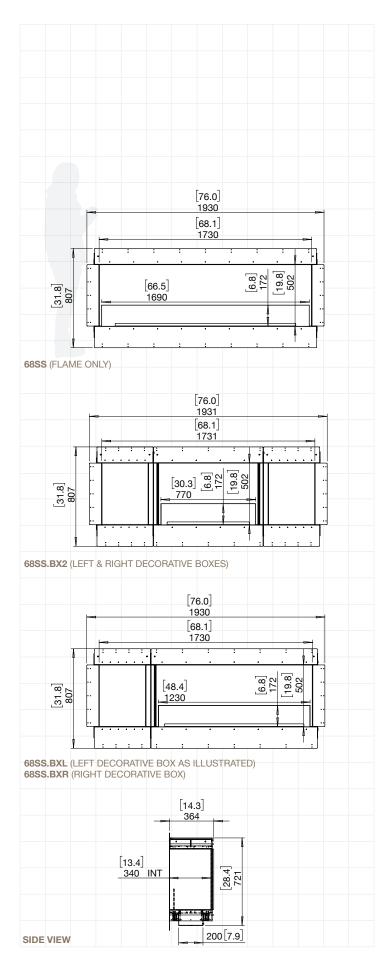

Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX68

ESF.2.FX.68SS

Weight	97.1kg [213.6lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL1200 x 1
Volume Capacity	10 Litres [2.6 Gallons] x 1
Heats on Average	Over 65 square metres [700 square feet]
Burn Time	9 - 14 hours (approx)
Minimum Room Size	115 cubic metres [4061 cubic feet] per fireplace

ESF.1.FX.68SS.BX2

Weight	93.9kg [206.7lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL500 x 1
Volume Capacity	5 Litres [1.3 Gallons]
Heats on Average	Over 40 square metres [430.6 square feet]
Burn Time	10 - 13 hours (approx)
Minimum Room Size	80 cubic metres [2825 cubic feet] per fireplace.

ESF.1.FX.**68SS.BXL** ESF.1.FX.**68SS.BXR**

Weight	95.1kg [209.2lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 1
Volume Capacity	9 Litres [2.4 Gallons]
Heats on Average	Over 60 square metres [645 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	110 cubic metres [3884 cubic feet] per fireplace.

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. The Fire Company Pty Ltd (TFC), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "The Fire Company"), disclaim any and all liability or any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. TFC disclaims any and all liability arising out of the use or applications of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify TFC Pt2s terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estopped or otherwise, to any intellectual property rights is granted by this document or by any conduct of TFC. Customers using or selling TFC products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify TFC for any damages are indicative only.

^{*} The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.




Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX78.BX2

ESF.1.FX. 78SS.BX2	(Not available in USA & Canada)
Weight	107.8kg [237.1lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL700 x 1
Volume Capacity	7 Litres [1.8 Gallons]
Heats on Average (when used indoors)	Over 50 square metres [538 square feet]
Burn Time	9 - 12 hours (approx)
Minimum Room Size	90 cubic metres [3178 cubic feet] per fireplace.


Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

^{*} The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.

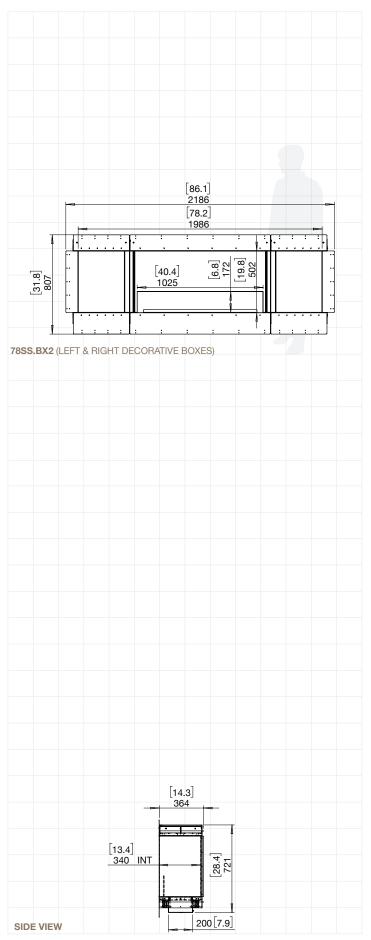

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL



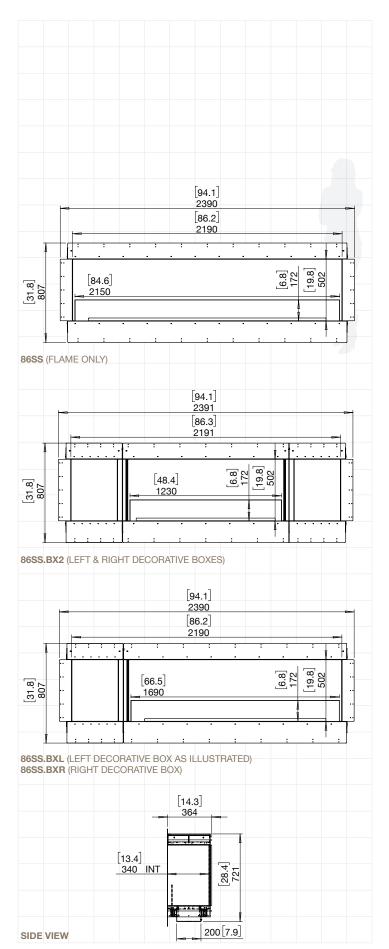

Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX86

ESF.1.FX.86SS

Weight	121.5kg [267.3lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 2
Volume Capacity	9 Litres [2.4 Gallons] x 2
Heats on Average	Over 120 square metres [1290 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	220 cubic metres [7768 cubic feet] per fireplace

ESF.1.FX.86SS.BX2

Weight	118.8kg [261.4lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 1
Volume Capacity	9 Litres [2.4 Gallons]
Heats on Average	Over 60 square metres [645 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	110 cubic metres [3884 cubic feet] per fireplace

ESF.2.FX.**86SS.BXL** ESF.2.FX.**86SS.BXR**

Weight	119.4kg [262.7lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL1200 x 1
Volume Capacity	10 Litres [2.6 Gallons] x 1
Heats on Average	Over 65 square metres [700 square feet]
Burn Time	9 - 14 hours (approx)
Minimum Room Size	115 cubic metres [4061 cubic feet] per fireplace

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. The Fire Company Pty Ltd (TFC), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "The Fire Company"), disclaim any and all liability or any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. TFC disclaims any and all liability arising out of the use or applications of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify TFC Pt2s terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estopped or otherwise, to any intellectual property rights is granted by this document or by any conduct of TFC. Customers using or selling TFC products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify TFC for any damages are indicative only.

^{*} The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.



Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX104

ESF.1.FX.104SS

Weight 146.2kg [321.6lbs] (Incl. burner/s, glass charcoal, glass) Burner* XL1200 x 2 Volume Capacity 10 Litres [2.6 Gallons] x 2 Heats on Average Over 130 square metres [1400 square feet] Burn Time 9 - 14 hours (approx) Minimum 230 cubic metres [8122 cubic feet] per fireplace		
Volume Capacity 10 Litres [2.6 Gallons] x 2 Heats on Average Over 130 square metres [1400 square feet] Burn Time 9 - 14 hours (approx) Minimum 230 cubic metres	Weight	146.2kg [321.6lbs] (Incl. burner/s, glass charcoal, glass)
Heats on Average Over 130 square metres [1400 square feet] Burn Time 9 - 14 hours (approx) Minimum 230 cubic metres	Burner*	XL1200 x 2
[1400 square feet] Burn Time 9 - 14 hours (approx) Minimum 230 cubic metres	Volume Capacity	10 Litres [2.6 Gallons] x 2
Minimum 230 cubic metres	Heats on Average	
	Burn Time	9 - 14 hours (approx)

ESF.2.FX.104SS.BX2


Weight	193.8kg [426.4lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL1200 x 1
Volume Capacity	10 Litres [2.6 Gallons] x 1
Heats on Average	Over 65 square metres [700 square feet]
Burn Time	9 - 14 hours (approx)
Minimum Room Size	115 cubic metres [4061 cubic feet] per fireplace

ESF.1.FX.104SS.BXL ESF.1.FX.104SS.BXR

201.1117.10100127.11	
Weight	145.2kg [319.4lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 2
Volume Capacity	9 Litres [2.4 Gallons] x 2
Heats on Average	Over 120 square metres [1290 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	220 cubic metres [7768 cubic feet] per fireplace


Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

^{*} The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.

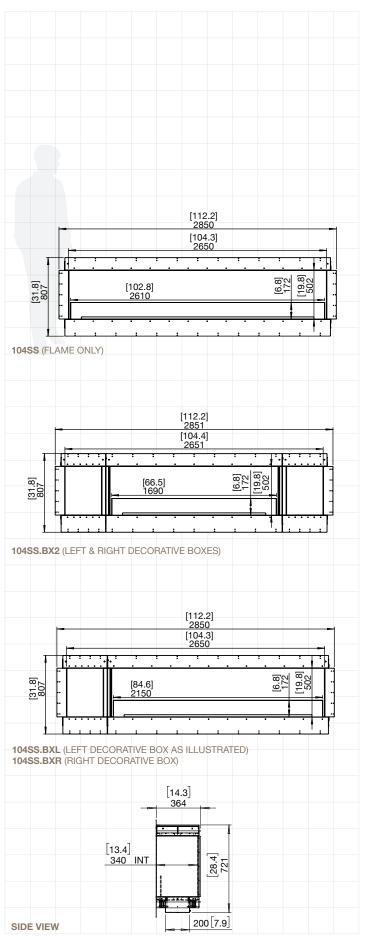

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL



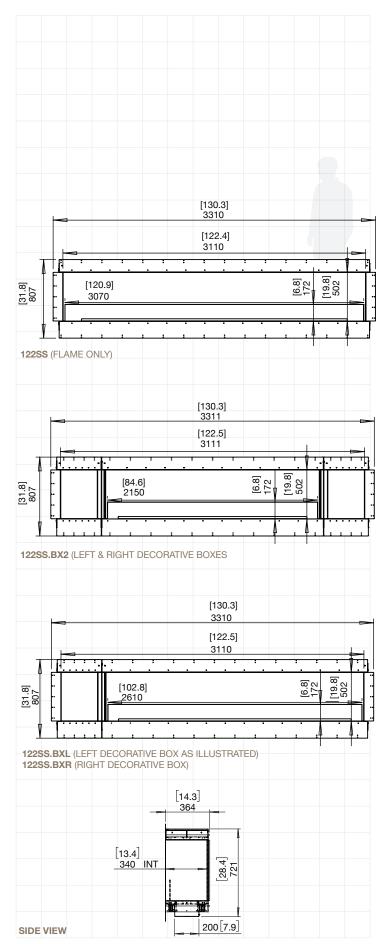

Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX122

ESF.1.FX.122SS

Weight	171.5kg [377.3lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 3
Volume Capacity	9 Litres [2.4 Gallons] x 3
Heats on Average	Over 180 square metres [1935 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	330 cubic metres [11652 cubic feet] per fireplace

ESF.1.FX.**122SS.BX2**

Weight	168.9kg [371.6lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 2
Volume Capacity	9 Litres [2.4 Gallons] x 2
Heats on Average	Over 120 square metres [1290 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	220 cubic metres [7768 cubic feet] per fireplace

ESF.1.FX.**122SS.BXL** ESF.1.FX.**122SS.BXR**

Weight	170.1kg [374.2lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL1200 x 2
Volume Capacity	10 Litres [2.6 Gallons] x 2
Heats on Average	Over 130 square metres [1400 square feet]
Burn Time	9 - 14 hours (approx)
Minimum Room Size	230 cubic metres [8122 cubic feet] per fireplace

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. The Fire Company Pty Ltd (TFC), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "The Fire Company"), disclaim any and all liability or any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. TFC disclaims any and all liability arising out of the use or applications of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify TFC Pt2s terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estopped or otherwise, to any intellectual property rights is granted by this document or by any conduct of TFC. Customers using or selling TFC products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify TFC for any damages are indicative only.

 $^{^{\}star}$ The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.



Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX140

ESF.1.FX.140SS.BX2


Weight	193.8kg [426.4lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL1200 x 2
Volume Capacity	10 Litres [2.6 Gallons] x 2
Heats on Average	Over 130 square metres [1400 square feet]
Burn Time	9 - 14 hours (approx)
Minimum Room Size	230 cubic metres [8122 cubic feet] per fireplace

ESF.1.FX.140SS.BXL ESF.1.FX.140SS.BXR

Weight	195.2kg [429.4lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 3
Volume Capacity	9 Litres [2.4 Gallons] x 3
Heats on Average	Over 180 square metres [1935 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	330 cubic metres [11652 cubic feet] per fireplace


Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

^{*} The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.

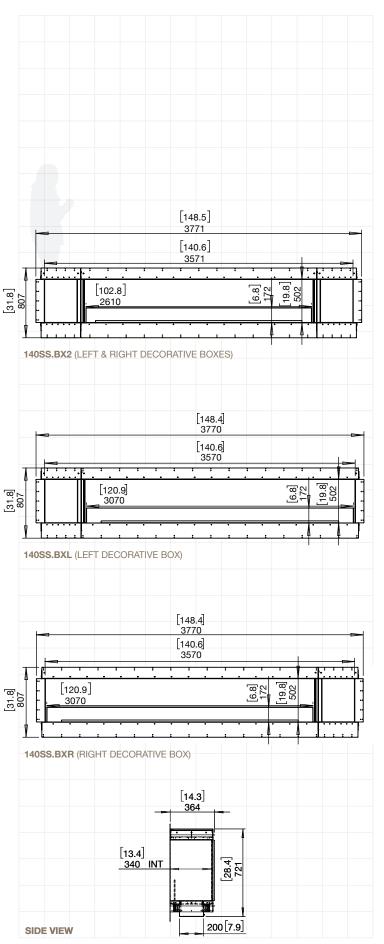

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL



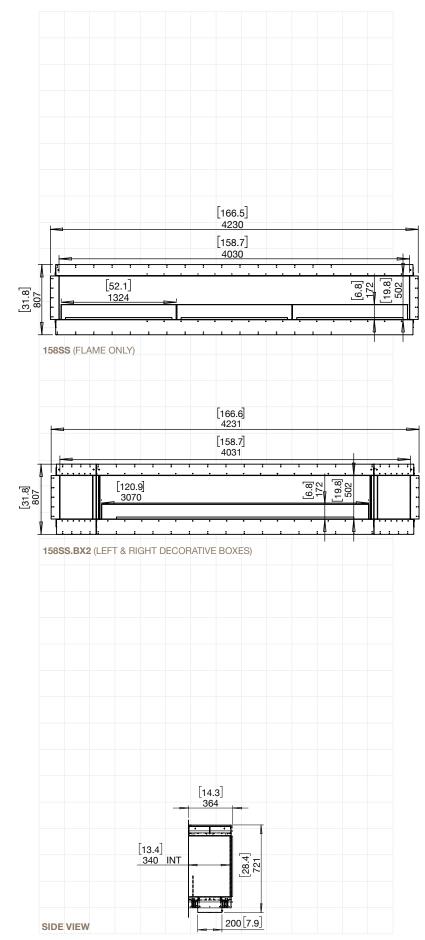

Application	Indoor & Outdoor
Materials	Mild Steel (Zinc Sealed), Toughened Glass, Stainless Steel & Glass Charcoal as Decorative Media
Colours	Black Firebox, Stainless Steel Burner/s
Fuel Type	e-NRG Bioethanol

FLEX158

ESF.1.FX.158SS

Weight	222.1kg [488.6lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL1200 x 3
Volume Capacity	10 Litres [2.6 Gallons] x 3
Heats on Average	Over 195 square metres [2100 square feet]
Burn Time	9 - 14 hours (approx)
Minimum Room Size	345 cubic metres [12183 cubic feet] per fireplace

ESF.1.FX.**158SS.BX2**

Weight	218.9kg [481.6lbs] (Incl. burner/s, glass charcoal, glass)
Burner*	XL900 x 3
Volume Capacity	9 Litres [2.4 Gallons] x 3
Heats on Average	Over 180 square metres [1935 square feet]
Burn Time	8 - 13 hours (approx)
Minimum Room Size	330 cubic metres [11652 cubic feet] per fireplace

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

^{*} The efficiency data outlined above is indicative only and may vary depending on the model purchased, weather conditions, installation and bioethanol used.