



# CLEARANCES & INSTALLATION MANUAL BIOETHANOL ONLY

Please read these instructions and the Burner Operations Manual provided with your burner completely before installing and operating the appliance.


## FRAME FIREPLACES




**Frame 600SS**  
37 kg [81.6 lb]




**Frame 800SS**  
41 kg [90.4 lb]



**Frame 1000SS**  
49.7 kg [109.6 lb]

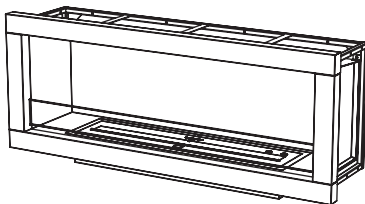

**Frame 1200SS**  
57.9 kg [127.6 lb]

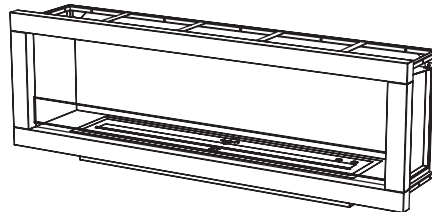

**Frame 1500SS**  
69.7 kg [153.7 lb]

e-nrg<sup>®</sup>  
natural . renewable . green

e-NRG is the ONLY fuel to be used in this appliance.

e-nrg.com  
e-nrg.com.au

## ! WARNINGS:

IF THE INFORMATION IN THIS MANUAL IS NOT FOLLOWED EXACTLY, A FIRE OR EXPLOSION MAY RESULT CAUSING PROPERTY DAMAGE, PERSONAL INJURY OR LOSS OF LIFE.



Do not fill while hot




Do not fill while operating



Do not overfill



Flammable



Use with supplied accessories



Keep away from children

## Table of Contents

### Appliance Clearances

---

SELECTING APPLIANCE LOCATION	2
VENTILATION	2
MINIMUM ROOM SIZE	2

### Appliance Installation

---

FRAMING	3
BEFORE GETTING STARTED	4
INSTALLATION	5 - 6
MANTEL SURROUNDS	6

---

These appliances are manufacturer approved for use only with the accompanying UL Listed Burner/s.

### Operation

Refer to the Operations Manual included with the Burner.

# Appliance Clearances

Please read these instructions completely before installing and operating the EcoSmart™ Fire.

## SELECTING APPLIANCE LOCATION

The appliance is zero clearance and has the necessary clearances to combustible frame components already built-in. They are engineered specifically to accept compatible EcoSmart Fire Burners.


When selecting a location for the appliance it is important to consider the required minimum room sizes and clearances to walls and combustible materials (see Clearances images below and Minimum Room Size table).

Note: Frame appliances are made from zinc sealed steel which is powder coated with super hi-temp black paint which prevents rusting. The burners are made of 304 stainless steel. To ensure the burner(s) continue looking great and to avoid rust or corrosion it is important any contamination or debris are cleaned or removed from the burner immediately.


If installed outdoors, the appliance must be located under a protective overhang to avoid it from filling with water and being permanently damaged. The warranty is void if the product is damaged as a result of installation in an exposed location.

When not in use, keep the burner lid closed to safeguard the burner from debris falling into the burner chamber and causing contamination.

**WARNING: Risk of Fire or Burns! Provide adequate clearance around air openings and for service access. Observe the clearances to combustibles recommended in this manual and the burner manual. Ensure that your fire is positioned away from flammable materials and other sources of ignition at all times. Due to high temperatures, the appliance should be located out of traffic and away from furniture and draperies. Pay very close attention to positioning the fire away from items that may move as a result of wind and drafts. For example trees/branches/curtains/paper and the like. Keep children at a safe distance at all times and never leave them unsupervised when the appliance is on or hot.**

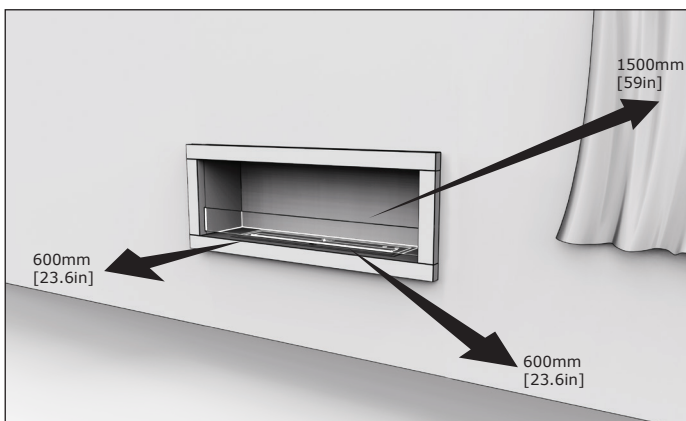

Indoor Clearances

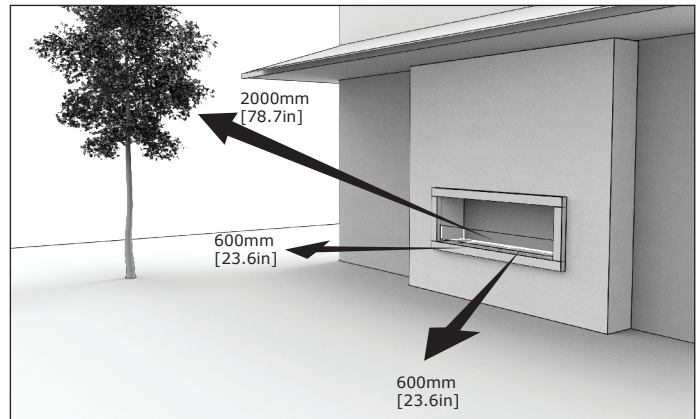

Outdoor Clearances (Need overhang or “roof extension” above the fireplace to ensure rain will not enter the firebox. Check with local building codes regarding requirements for overhangs / roof extensions.)

## VENTILATION

EcoSmart Fires do not require any form of permanent fixture or fitting, such as a flue for ventilation, a permanent connection or any kind of fixed utility for fuel supply.

**Do not cover any existing ventilation systems or structures that are built or installed within the chosen installation area.**

To ensure adequate ventilation, make sure to follow the guidelines in the table shown.

Underwriters Laboratories (UL) calculates adequate air exchange as follows:

In a house of typical construction, that is, one that is not of unusually tight construction due to heavy insulation and tight seals against air infiltration, an adequate supply of air for combustion and ventilation is provided through infiltration. However, if the Burner is used in a small room where less than **5.7m³ [200ft³]** of air space is provided for each **1,000 BTU** per hour of appliance rating (considering the maximum Burner setting), the door(s) to adjacent room(s) should be kept open or a window to the outside should be opened at least **25.4mm [1in]** to guard against potential build up of indoor air pollution. Do not install or operate in a bathroom or any other small room.

## MINIMUM ROOM SIZE

Ventilation table based on number of burners (per appliance).

Appliance	Burner/s	Minimum Room Size	BTU/h	kW
Frame 600SS	1x BK5	70 m³ [2,472 ft³]	13,000	3.5
Frame 800SS	1x XL500	80 m³ [2,825 ft³]	11,430	3.35
Frame 1000SS	1x XL700	90 m³ [3,178 ft³]	13,650	4
Frame 1200SS	1x XL900	110 m³ [3,884 ft³]	15,000	4.4
Frame 1500SS	1x XL1200	115 m³ [4,061 ft³]	15,290	4.5

NOT INTENDED FOR USE AS A PRIMARY HEAT SOURCE.

This appliance is tested and approved as either a supplemental room heat or as a decorative appliances. It should not be factored as primary heat in residential heating calculations.

## Appliance Installation

These appliances must be installed into a fixed secure position before being operated.

**NOTICE: DO NOT INSTALL DIRECTLY BESIDE OR NEAR WALLPAPER, LAMINATE, VENEER OR ANY SURFACE THAT IS NOT DESIGNED TO WITHSTAND HEAT AND HIGH TEMPERATURES** (the heat will impact the material, and in some circumstances the glue used for its application). **THE AREA AROUND THE APPLIANCE GETS HOT. HEAT SENSITIVE/REACTIVE MATERIALS SHOULD NOT BE USED. DO NOT PLACE FLAMMABLE OBJECTS ON OR AROUND THE APPARATUS.**

These appliances are not designed to incorporate doors or opening covers.

The appliance must remain open at all times for ventilation – it is not designed to operate as an oven or similar “hot box” – the flame must have a constant supply of air to operate and be able to circulate and distribute the heat effectively

**DO NOT PACK REQUIRED AIR SPACES** (the space between the appliance and the spacer ) **WITH INSULATION OR OTHER MATERIALS.** **THE AIR SPACERS ARE NEEDED TO ENSURE PROPER TEMPERATURES ARE MAINTAINED BEHIND THE APPLIANCE.**

Do not modify the appliance in any way during installation. Cutting of sheet metal parts of the appliance is prohibited.

Expansion and contraction of internal parts due to heating and cooling off may create noise. This is normal.

**WARNING: DO NOT OPERATE WITHOUT THE GLASS WINDSCREEN**


**The appliance must be fully assembled before being operated. Failure to install (or removal of) glass panels will void the warranty and render the product unapproved for use with the included burner.**

### FRAMING

#### Important Considerations for Framing

1. The appliance must be installed on a level surface capable of supporting the appliance, burner, glass charcoal and full fuel capacity.
2. The framing dimensions shown in the instructions are the optimum dimensions that allow best fit with gyprock / sheetrock / plasterboard (or other facing/finishing material) after the appliance has been installed.
3. Prepare the installation location. If placing the appliance on a platform, build the platform, making sure to accommodate the weight of the appliance, burner and fuel. Verify that the platform is level.

4. If placing the appliance close to the floor, install 100 mm [3.9 in] from the bottom front firebox frame. This height sets the minimum clearance above a combustible or non-combustible floor.

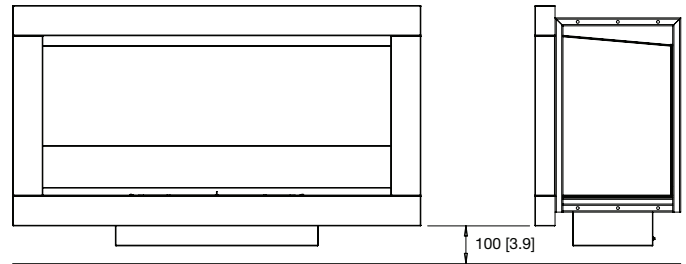

In the case of insufficient capacity to hold the weight of the appliance, measures must be taken to reinforce the setting (for example installation of a plate for load distribution) so that the setting is suitable for installation.

**IMPORTANT: The framing above the appliance must be self-supporting. The appliance is not load-bearing.**

### DEFINITIONS

**Combustible materials** - Materials made of or surfaced with wood, compressed paper, plant fibers, plastics, or other material that can ignite and burn, whether flame produced or not, or plastered or unplastered shall be considered combustible materials.

**Non-combustible materials** - materials which will not ignite and burn. Such materials are those consisting entirely of steel, iron, brick, tile, concrete, slate, glass or plasters, or any combination thereof. HardieBacker®, WonderBoard®, Durock® or materials that are reported as passing ASTM E 136, Standard Test Method for Behavior of Materials in a Vertical Tube Furnace at 750C shall be considered non-combustible materials.


**NOTE:** Illustrations reflect typical installations and are for DESIGN PURPOSES ONLY. Illustrations/diagrams are not drawn to scale. Actual installation may vary due to individual design preferences.

## Appliance Installation


### BEFORE GETTING STARTED

1. Carefully remove the appliance and components from the packaging
2. Inspect and report any parts damaged in shipment, particularly the condition of the glass windscreen.
3. Read all of the instructions before starting the installation. Follow these instructions carefully during the installation to ensure maximum safety and benefit.

**WARNING: Risk of fire or explosion! Damaged parts could impair safe operation. Do not install damaged, incomplete or substitute components.**

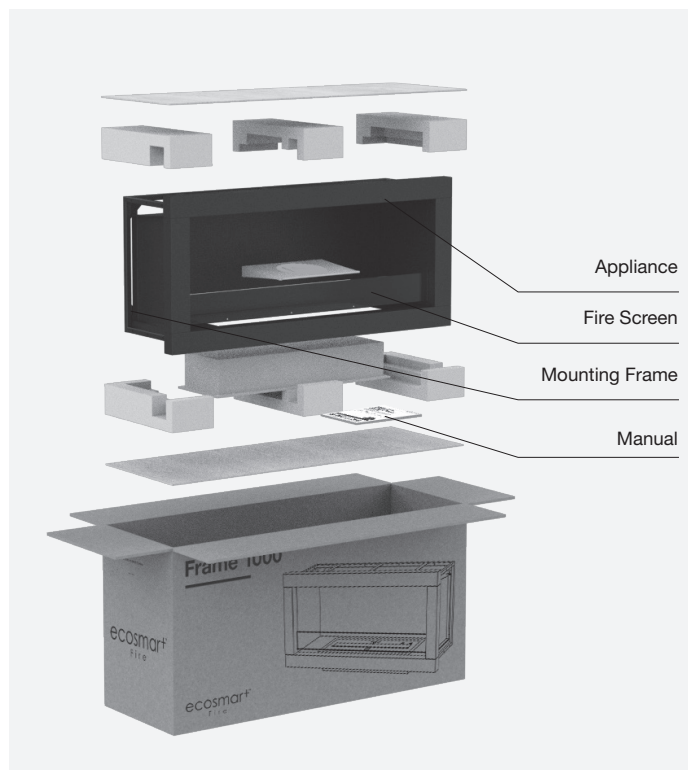

Appliance Packaging

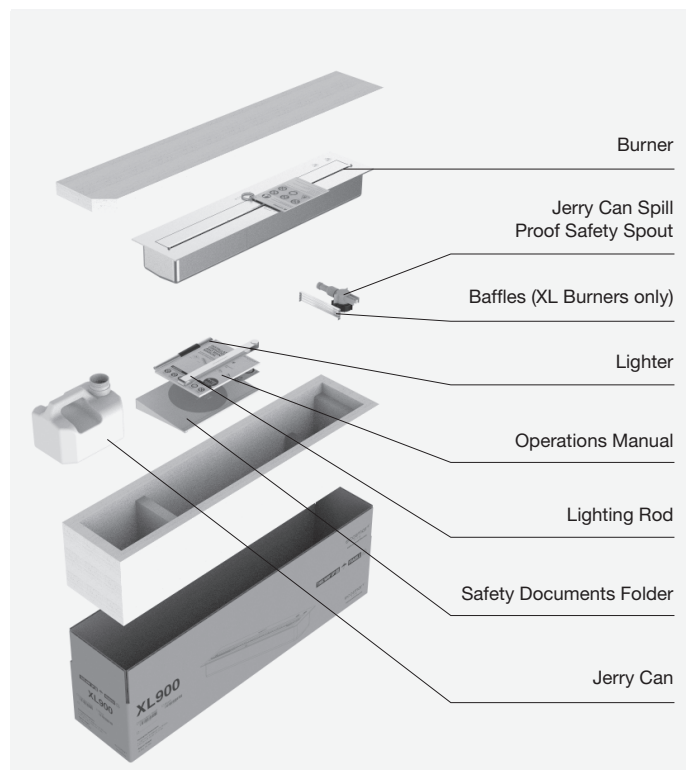


Burner Carton

# Appliance Installation

**Equipment required:** Power Drill (or Philips Screw Driver), M4 CS Philips Wood Screws (40MM)

1. Construct the main wall framework with the opening size shown in Table A.

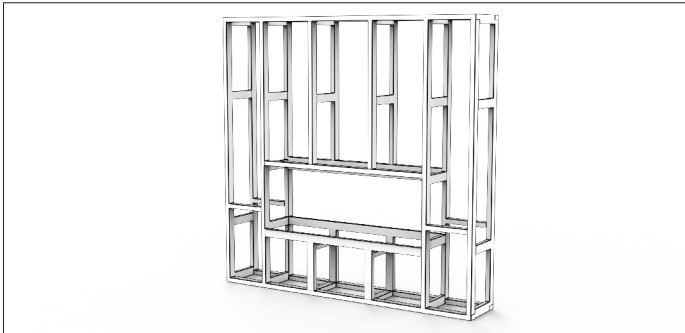

**Table A: Framework Opening Sizes**


Physical appliance dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

APPLIANCE	A mm [in]	B mm [in]	H mm [in]	C Clearance for Top Tray	Weight kg [lb]
600SS	703 [27.7]	363 [14.3]	695 [27.4]	130 [5.1]	37 [81.6]
800SS	972 [38.3]	323 [12.7]	500 [19.7]	130 [5.1]	41 [90.4]
1000SS	1,173 [46.2]	323 [12.7]	500 [19.7]	130 [5.1]	49.7 [109.6]
1200SS	1,373 [54.1]	323 [12.7]	500 [19.7]	130 [5.1]	57.9 [127.6]
1500SS	1,673 [65.9]	323 [12.7]	500 [19.7]	130 [5.1]	69.7 [153.7]


\* Appliance weight includes burner (dry weight excluding fuel), tray top and glass screen

**IMPORTANT: The framing above the appliance must be self-supporting. The appliance is not load-bearing.**


2. Please leave a clearance below the fireplace cavity to accommodate the top tray (refer to Table A).

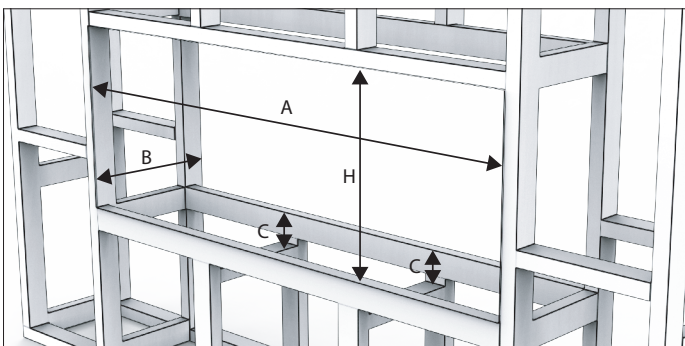


3. Apply surrounding wall panels. The zero clearance firebox inserts are designed for installation into a wall or cavity made from combustible or non-combustible materials.

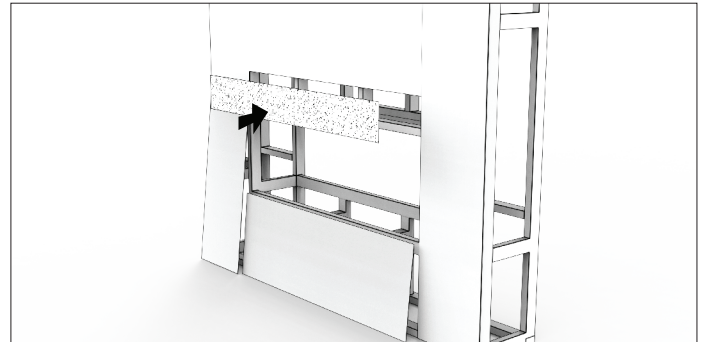

4. Insert the mounting frame into the cavity.

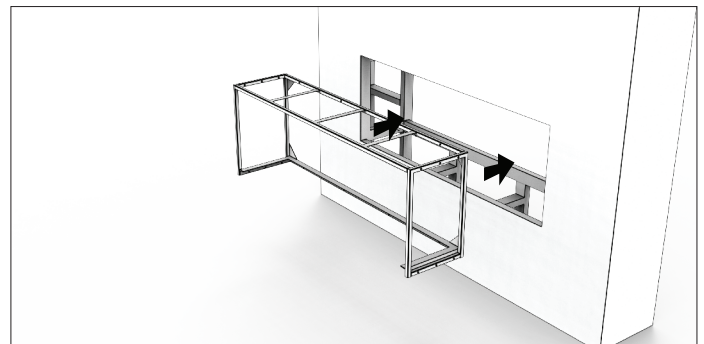

5. Ensure the frame insert is flush with finished wall surface. Secure the frame to the stud wall using suitable screws. The wall frame has multiple fixing positions to cater for varying wall materials and areas where extra support may be needed. (Timber cs screw shown in example).

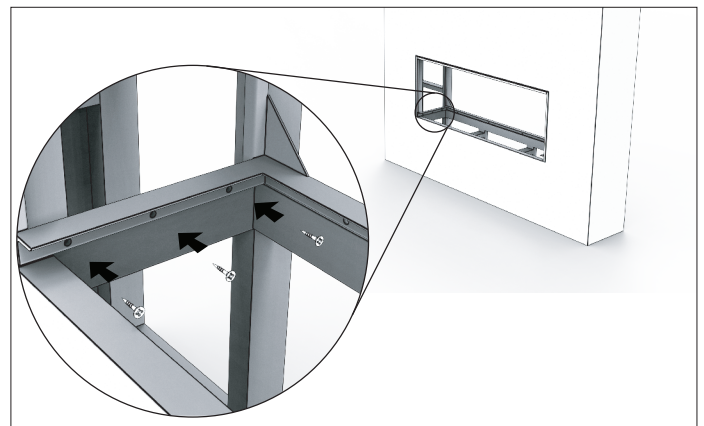


## Mantel Surrounds

### MINIMUM CLEARANCES


If the setting incorporates a mantel the minimum vertical and maximum horizontal dimensions to combustible mantel identified in the image below must be followed.

#### Finishing clearances to COMBUSTIBLES

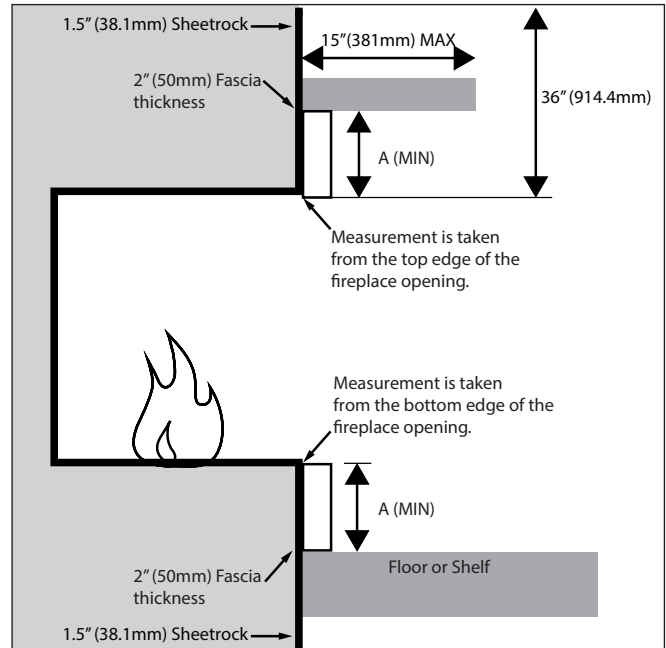

Minimum vertical and maximum horizontal dimensions of combustible mantel.


#### Finishing and clearances to NON-COMBUSTIBLES

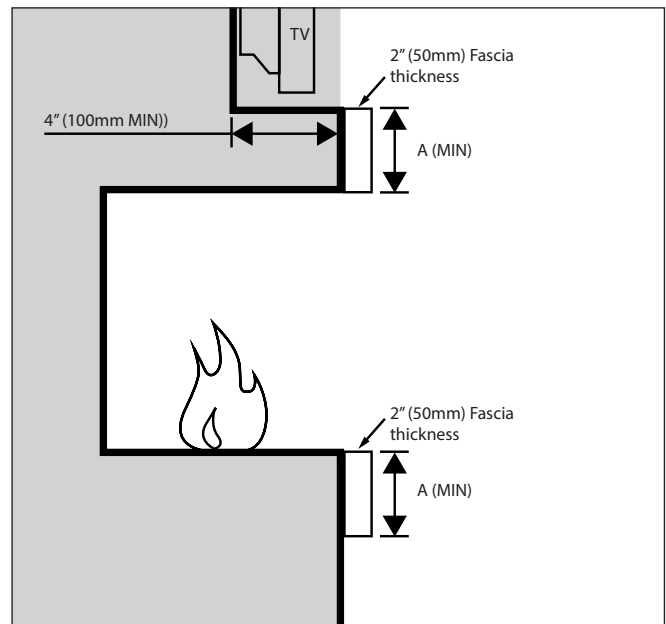


Minimum vertical and maximum horizontal dimensions of non-combustible mantel.

**Warning! Risk of Fire! Comply with all minimum clearances to combustibles as specified. Framing or finishing material closer than the minimum listed must be constructed entirely of non-combustible materials.**


6. Push the firebox into the cavity. Push until the magnets engage with the mounting frame.

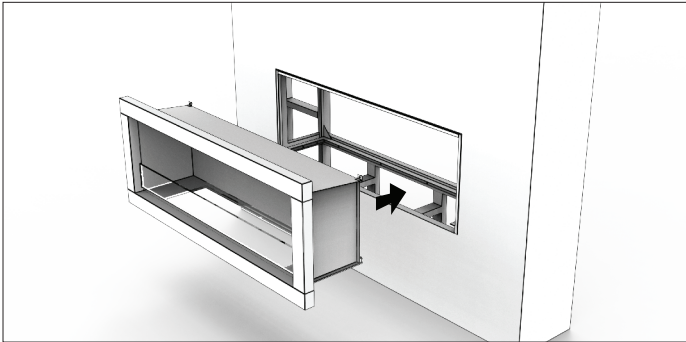

7. Insert Top Tray.

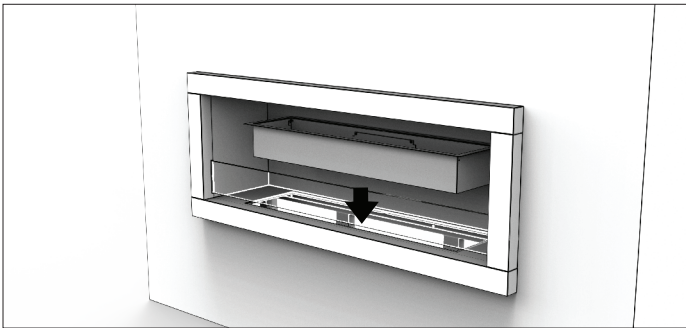

8. Insert burner into Top Tray.

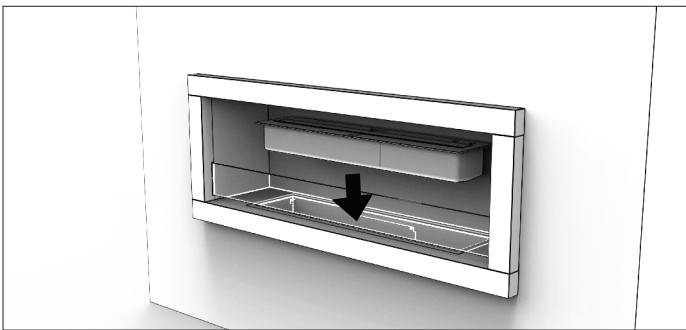

**OPERATE ACCORDING TO THE BURNER OPERATIONS MANUAL INCLUDED WITH THE BURNER.**



**MAD Design Group**

Tel: +61 2 9997 3050

Email: [info@maddesigngroup.com](mailto:info@maddesigngroup.com)

V2510